


125mm Grommet Slotted FG125-002

INTRODELTA^{LTD}

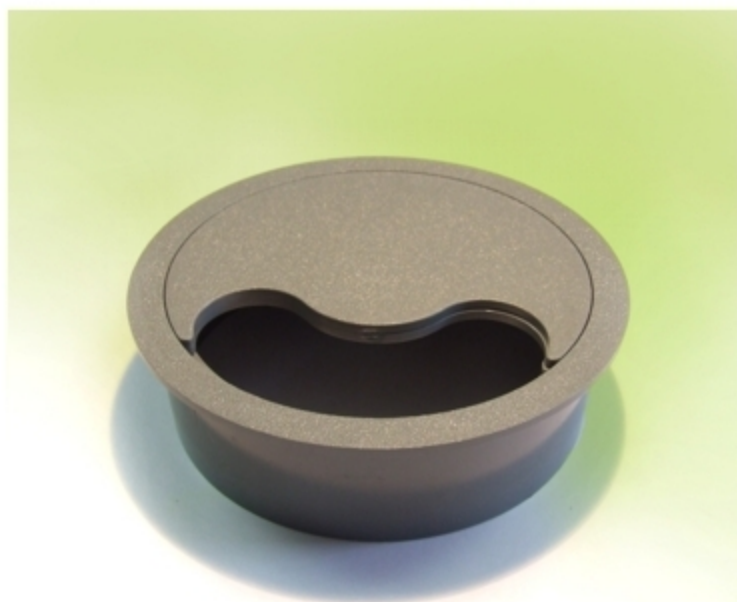

TECHNICAL SPECIFICATION:	125mm
Overall diameter of bezel:	140 mm
Fixing hole required:	127 mm
Flange depth below surface:	37 mm
Bezel thickness above surface:	3 mm
Inside diameter of flange:	111 mm
Max. cable diameter:	18 mm

Description

The grommet consists of an outer flange, which push-fits into a circular aperture provided in the raised floor. The outer flange will allow a hand to pass through it to access the floor void. The grommet has a top-assembly which is snapped into the outer flange. The top assembly has a cover which rotates to reveal a 28mm slot which can be set from 0 to 100mm. The cables are passed through the slot prior to the top assembly being inserted within the outer flange.

The selection of only the appropriate number of holes promotes a clean and tidy appearance. *This grommet size is also available fitted with 3 x 20mm holes, see specification FG125-001.*

COLOURS

Black or Grey.